



LONGITUDINAL: EIXO XX (BESS)
Esc. H/V: 200/200

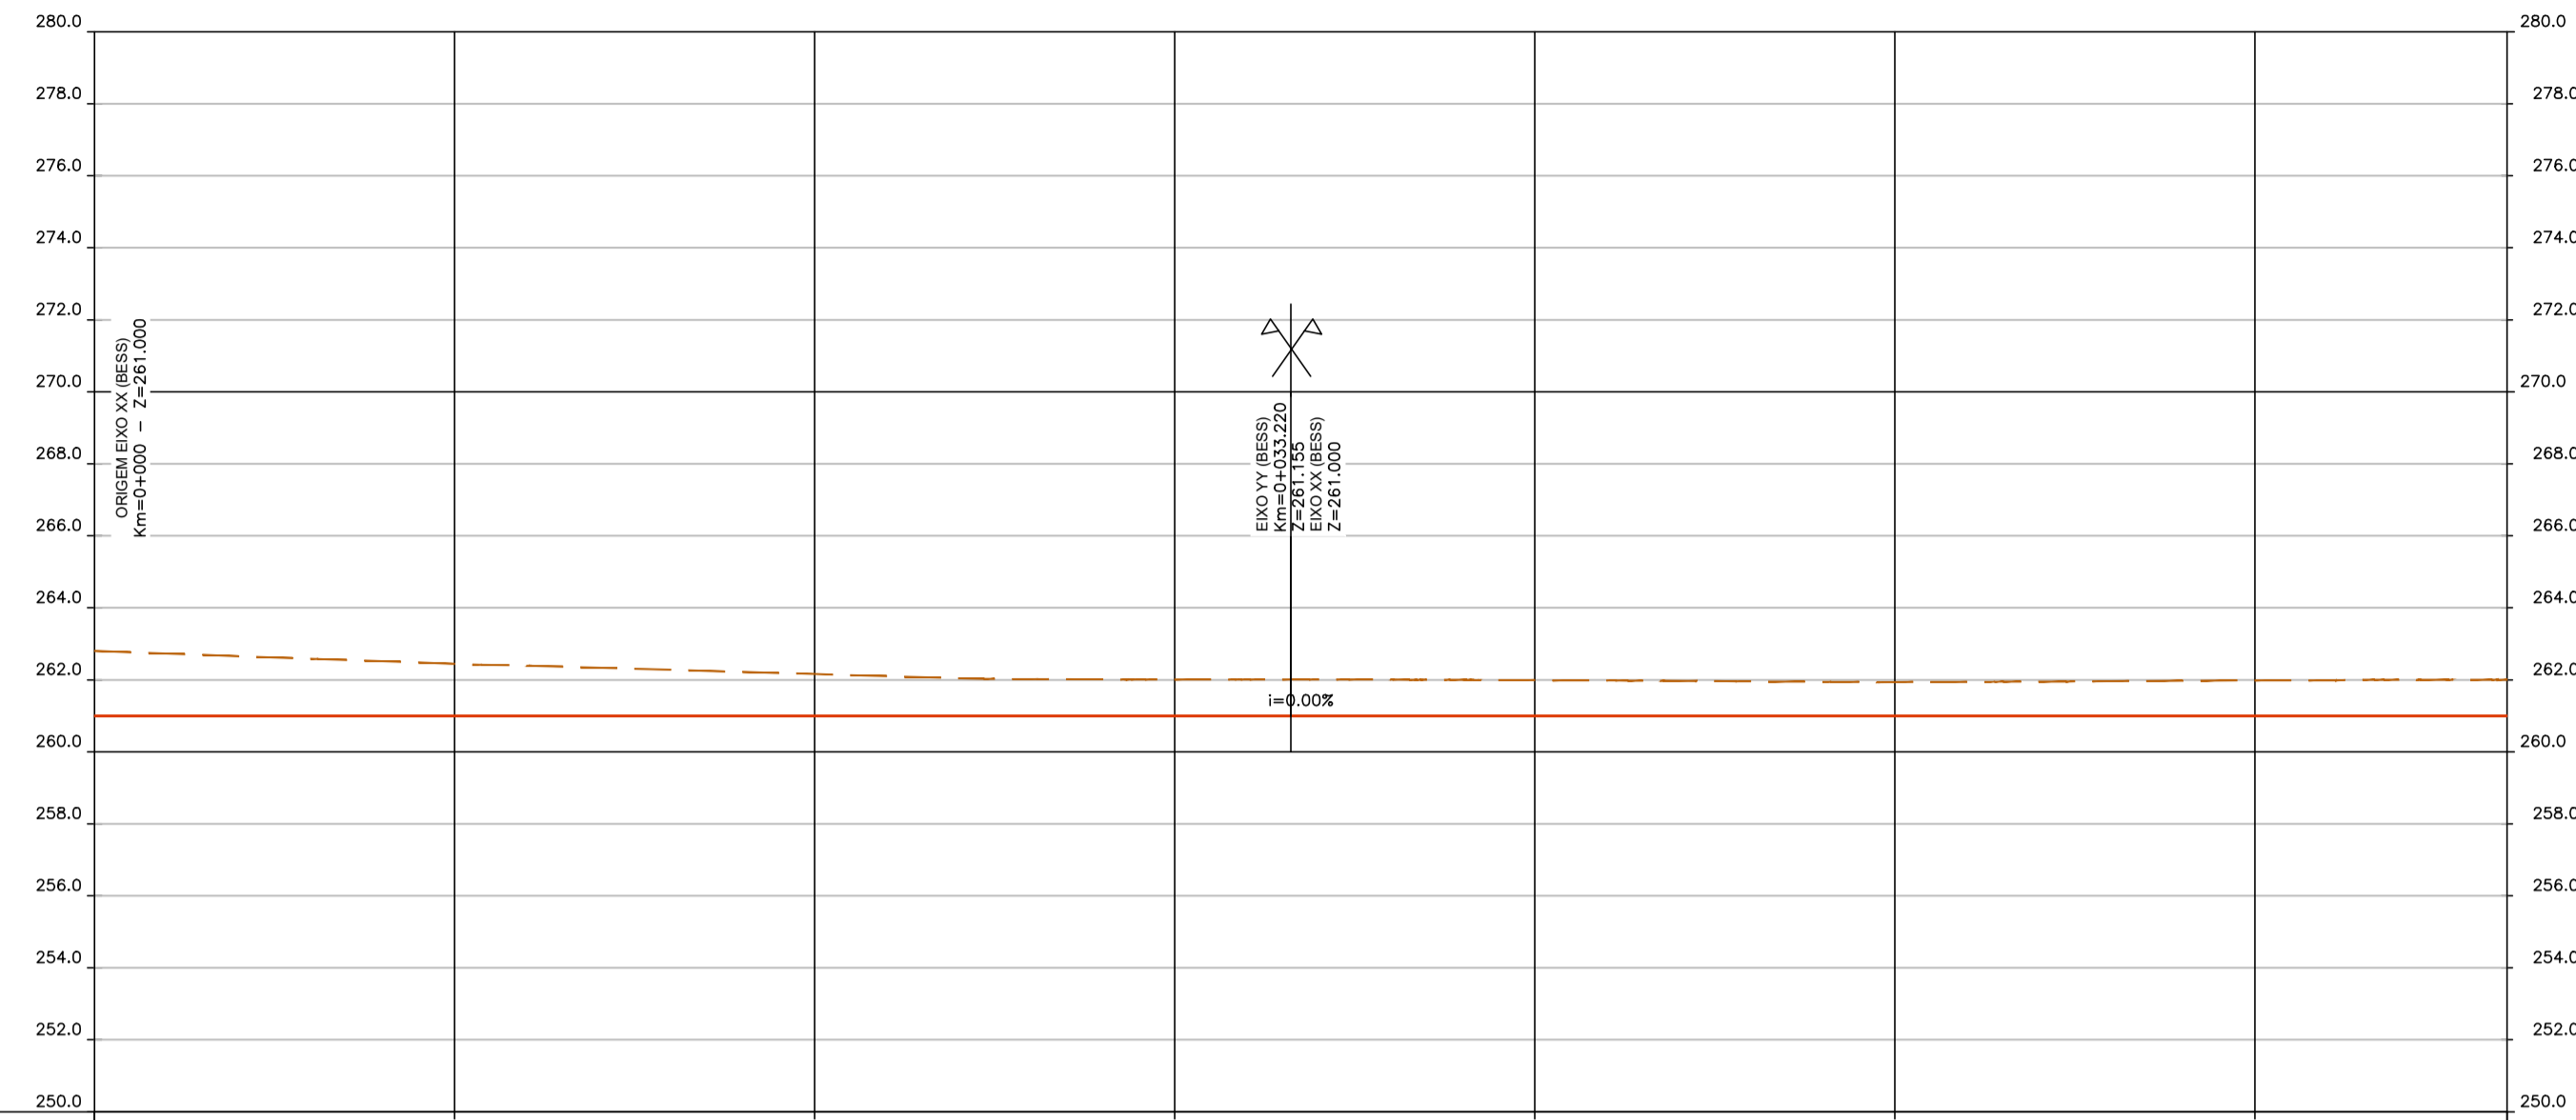

PERFIL LONGITUDINAL	QUILOMETRAGEM	0+010	0+020	0+030	0+040	0+050	0+060
	COTAS DA RASANTE	-1.73 - 262.73 261.00	-1.66 - 262.66 261.00	-1.58 - 262.58 261.00	-1.51 - 262.51 261.00	-1.44 - 262.44 261.00	-1.39 - 262.39 261.00
COTAS DO TERRENO	-1.73 - 262.73 261.00	-1.66 - 262.66 261.00	-1.58 - 262.58 261.00	-1.51 - 262.51 261.00	-1.44 - 262.44 261.00	-1.39 - 262.39 261.00	-1.33 - 262.33 261.00
COTAS DE TRABALHO	-1.73 - 262.73 261.00	-1.66 - 262.66 261.00	-1.58 - 262.58 261.00	-1.51 - 262.51 261.00	-1.44 - 262.44 261.00	-1.39 - 262.39 261.00	-1.33 - 262.33 261.00
ELEMENTOS DA RASANTE	Incl.=0.00% L=67.00						
SOBRELEVAÇÃO (%)	E=+1.000% D=+1.000% 0+015.00						
PONTOS NOTÁVEIS	L=67.00						
DIAGRAMA DE CURVAS	R= 00						

LONGITUDINAL: EIXO YY (BESS)
Esc. H/V: 200/200

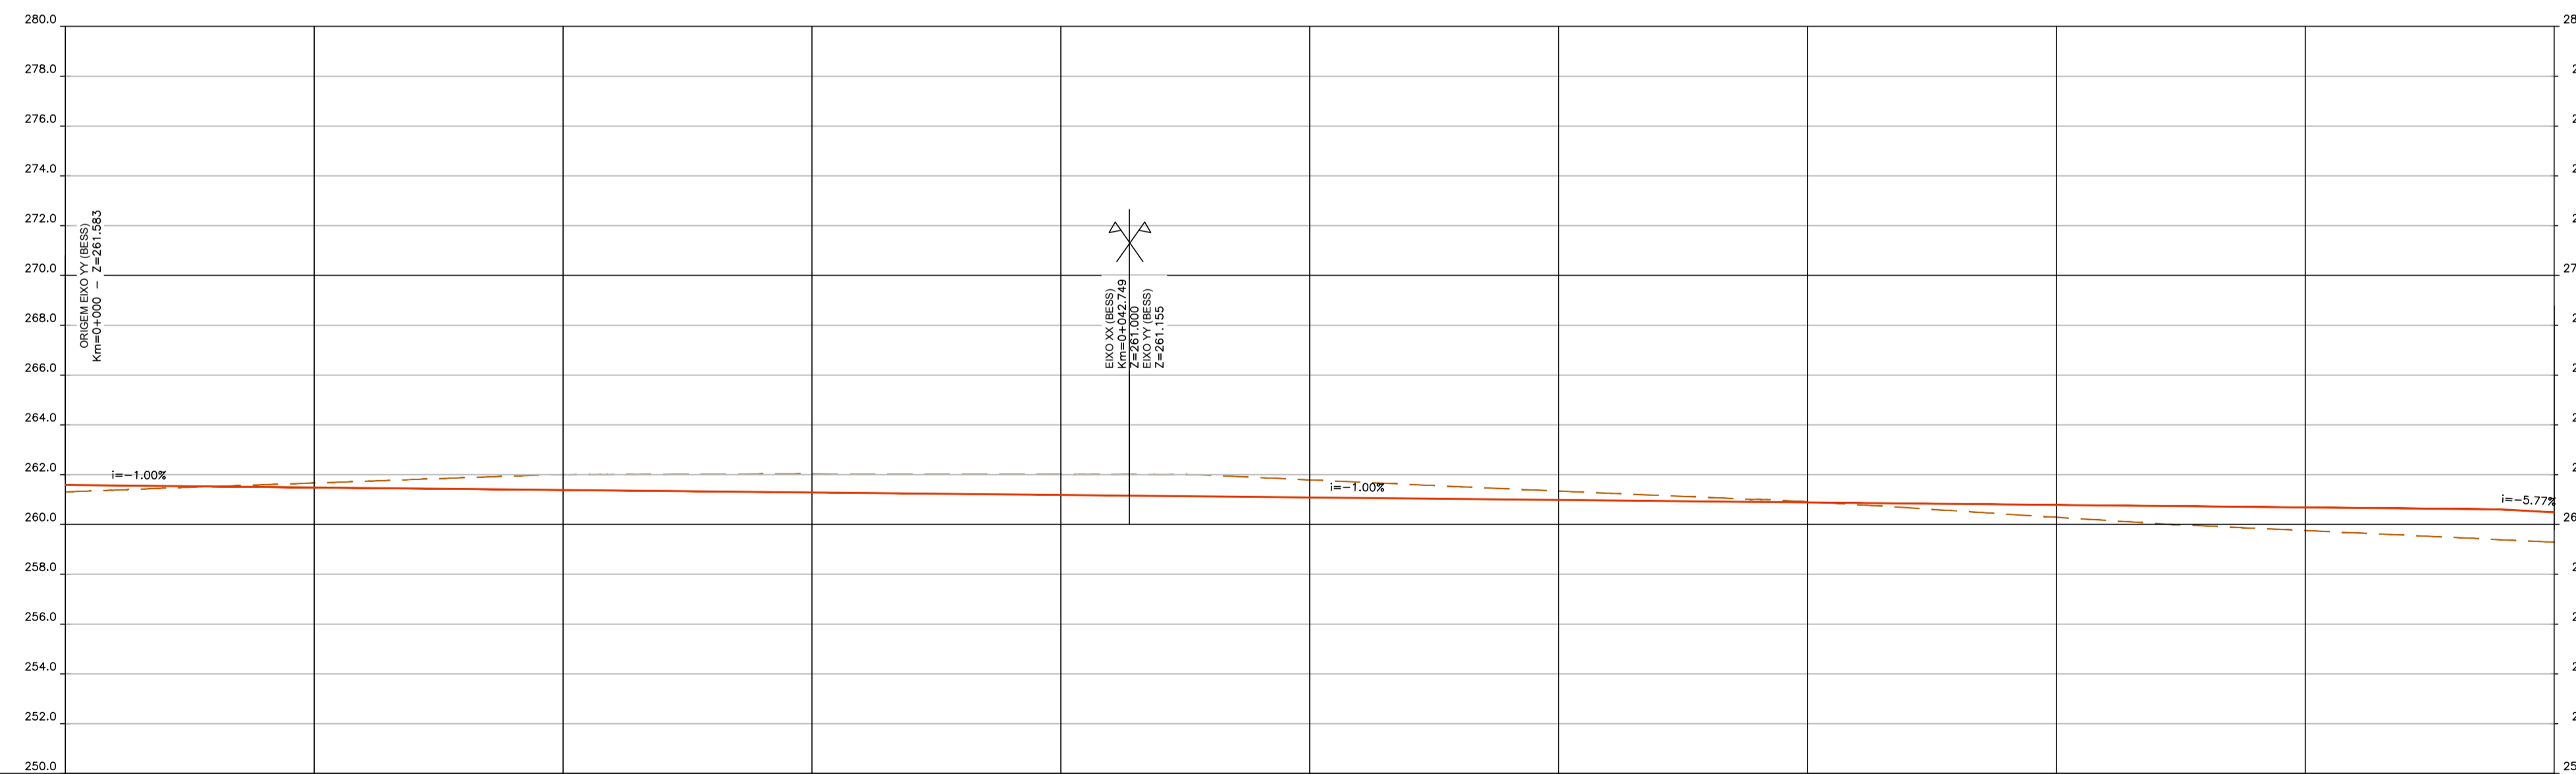

PERFIL LONGITUDINAL	QUILOMETRAGEM	0+010	0+020	0+030	0+040	0+050	0+060	0+070	0+080	0+090																																							
	COTAS DA RASANTE	0.18 - 261.39 261.56	0.08 - 261.48 261.54	-0.01 - 261.53 261.52	-0.10 - 261.62 261.50	-0.19 - 261.67 261.48	-0.27 - 261.74 261.46	-0.36 - 261.81 261.44	-0.45 - 261.88 261.42	-0.54 - 261.96 261.40	-0.62 - 262.02 261.38	-0.64 - 262.01 261.36	-0.67 - 262.03 261.34	-0.70 - 262.05 261.32	-0.72 - 262.03 261.30	-0.74 - 262.04 261.28	-0.76 - 262.02 261.26	-0.78 - 262.00 261.24	-0.80 - 262.02 261.22	-0.82 - 262.02 261.20	-0.83 - 262.02 261.18	-0.85 - 262.01 261.16	-0.86 - 262.01 261.14	-0.85 - 261.98 261.12	-0.78 - 261.88 261.10	-0.71 - 261.78 261.08	-0.64 - 261.70 261.06	-0.56 - 261.61 261.04	-0.49 - 261.52 261.02	-0.43 - 261.43 261.00	-0.36 - 261.34 260.98	-0.29 - 261.25 260.96	-0.23 - 261.17 260.94	-0.16 - 261.09 260.92	-0.10 - 261.00 260.90	-0.03 - 260.94 260.88	0.07 - 260.78 260.86	0.17 - 260.67 260.84	0.28 - 260.54 260.82	0.39 - 260.41 260.80	0.50 - 260.29 260.78	0.60 - 260.16 260.76	0.70 - 260.04 260.74	0.78 - 259.94 260.72	0.85 - 259.85 260.70	0.93 - 259.76 260.68	1.00 - 259.68 260.66	1.07 - 259.57 260.64	1.15 - 259.48 260.62
COTAS DO TERRENO	0.18 - 261.39 261.56	0.08 - 261.48 261.54	-0.01 - 261.53 261.52	-0.10 - 261.62 261.50	-0.19 - 261.67 261.48	-0.27 - 261.74 261.46	-0.36 - 261.81 261.44	-0.45 - 261.88 261.42	-0.54 - 261.96 261.40	-0.62 - 262.02 261.38	-0.64 - 262.01 261.36	-0.67 - 262.03 261.34	-0.70 - 262.05 261.32	-0.72 - 262.03 261.30	-0.74 - 262.04 261.28	-0.76 - 262.02 261.26	-0.78 - 262.00 261.24	-0.80 - 262.02 261.22	-0.82 - 262.02 261.20	-0.83 - 262.02 261.18	-0.85 - 262.01 261.16	-0.86 - 262.01 261.14	-0.85 - 261.98 261.12	-0.78 - 261.88 261.10	-0.71 - 261.78 261.08	-0.64 - 261.70 261.06	-0.56 - 261.61 261.04	-0.49 - 261.52 261.02	-0.43 - 261.43 261.00	-0.36 - 261.34 260.98	-0.29 - 261.25 260.96	-0.23 - 261.17 260.94	-0.16 - 261.09 260.92	-0.10 - 261.00 260.90	-0.03 - 260.94 260.88	0.07 - 260.78 260.86	0.17 - 260.67 260.84	0.28 - 260.54 260.82	0.39 - 260.41 260.80	0.50 - 260.29 260.78	0.60 - 260.16 260.76	0.70 - 260.04 260.74	0.78 - 259.94 260.72	0.85 - 259.85 260.70	0.93 - 259.76 260.68	1.00 - 259.68 260.66	1.07 - 259.57 260.64	1.15 - 259.48 260.62	1.22 - 259.38 260.60
COTAS DE TRABALHO	0.18 - 261.39 261.56	0.08 - 261.48 261.54	-0.01 - 261.53 261.52	-0.10 - 261.62 261.50	-0.19 - 261.67 261.48	-0.27 - 261.74 261.46	-0.36 - 261.81 261.44	-0.45 - 261.88 261.42	-0.54 - 261.96 261.40	-0.62 - 262.02 261.38	-0.64 - 262.01 261.36	-0.67 - 262.03 261.34	-0.70 - 262.05 261.32	-0.72 - 262.03 261.30	-0.74 - 262.04 261.28	-0.76 - 262.02 261.26	-0.78 - 262.00 261.24	-0.80 - 262.02 261.22	-0.82 - 262.02 261.20	-0.83 - 262.02 261.18	-0.85 - 262.01 261.16	-0.86 - 262.01 261.14	-0.85 - 261.98 261.12	-0.78 - 261.88 261.10	-0.71 - 261.78 261.08	-0.64 - 261.70 261.06	-0.56 - 261.61 261.04	-0.49 - 261.52 261.02	-0.43 - 261.43 261.00	-0.36 - 261.34 260.98	-0.29 - 261.25 260.96	-0.23 - 261.17 260.94	-0.16 - 261.09 260.92	-0.10 - 261.00 260.90	-0.03 - 260.94 260.88	0.07 - 260.78 260.86	0.17 - 260.67 260.84	0.28 - 260.54 260.82	0.39 - 260.41 260.80	0.50 - 260.29 260.78	0.60 - 260.16 260.76	0.70 - 260.04 260.74	0.78 - 259.94 260.72	0.85 - 259.85 260.70	0.93 - 259.76 260.68	1.00 - 259.68 260.66	1.07 - 259.57 260.64	1.15 - 259.48 260.62	1.22 - 259.38 260.60
ELEMENTOS DA RASANTE	Incl.= -1.0000% L=5.902											Incl.= -1.0000% L=92.000											Incl.= -5.7672% L=2.098																										
SOBRELEVAÇÃO (%)	E=+0.000% D=+0.000%											E=+0.000% D=+0.000%											E=+0.000% D=+0.000%																										
PONTOS NOTÁVEIS	0+000.00											L=100.00											0+100.00																										
DIAGRAMA DE CURVAS	R= 00											R= 00											R= 00																										

 engisep engenharia e consultoria, Lda	PROJECT: CSF PEREIRO PEREIRO PV PLANT PROJETO BASE BASE DESIGN									
	FILE NAME: PL12.2.dwg									
 enel Green Power Engineering & Construction EGP VALIDATION	CLASSIFICATION:	FORMAT: A1	SCALE: 1:200	PLOT SCALE: 1:1	SHEET: 01 OF 01					
	UTILIZATION SCOPE:	TITLE: Perfis Longitudinais da BESS BESS Profiles								
VALIDATED BY: PM	EGP CODE									
VERIFIED BY: JC	GROUP: GRE	FUNCTION: EEC	TYPE: D	ISSUER: 74	COUNTRY: PTP	PLANT: 12379	SYSTEM: 16	PROGRESSIVE:	REVISION: 00	
COLLABORATORS: NM	<small>This document is property of Enel Green Power SpA. It is strictly forbidden to reproduce this document, in whole or in part, and to provide to others any related information without the previous written consent by Enel Green Power SpA.</small>									